



NV GOLF OY

# Who are we?

- David Nelson, Founder & Managing Director of the group “Nelson&Vecchio”
- Raoul Bergman, Chairman of the Board of “NV Golf Oy”
- Head office Girvan, Turnberry, Scotland
- Nelson Vecchio formed in 2010
- Nelson Golf International formed in 2016
- NV Golf Oy formed in 2018
- Offices in Scotland, Poland, Sweden & Finland
- As of today, 43 employees throughout Europe

# So, what's this guy done?

Ryder Cup: K-Club, Ireland – Celtic Manor, Wales

US Open: Chamber bay, Washington State

RTJ2 Europe: Sjkolnaesholm, Bro Hoff Slott, The Scandinavian, Lubker  
Golf Resort (2008 best new international golf course) Zala Springs,  
Royal La Bagnaia, Palmares Golf & Beach Resort.

# What do we do?

- Golf course construction
- Golf Course renovation
- Golf Course Irrigation
- Golf Course Drainage

**“Golf, it’s all we do!”**

# Clients and Golf Clubs we work with:

- Kristianstad GK East & West (SE)
- The Great Northern (DK)
- Alands Golf Club (FI)
- Himmerland Golf Resort (DK)
- Parnu Bay (EE)
- Simons Golf Resort (DK)
- Miklagard Golf (NO)
- Djursholm (SE)
- Visby GK (SE)
- Golf Klub Fohr (DE)
- Solvesborg GK (SE)

Currently under Construction:

- Pickala “Rock”
- Araslov Golf Klub (SE)

Completed projects to date = 34

Long term contracts= 3

Clients currently advising = 12

# Rainbird IC Irrigation Installs

- Parnu Bay
- Kristianstad (West)
- Djursholm Golf Klubb
- Alands Golf Klubb
- Haninge Golf Klubb
- Miklagard Golf
- Visby Golf Klubb

Currently under installation

- Pickala “Rock”
- Araslov GK

Total Rainbird IC Installs = 9

# The Team:



Contracts Director (Irrigation)-  
Marcin Kuralowicz

Marcin joined Nelson&Vecchio in 2012 for the installation at Parnu Bay, In 2018 he took up the position of Irrigation Manager and has successfully installed 8 irrigation systems as manager. In 2022 Marcin was promoted to Contracts Director.

# Nelson & Vecchio Irrigation Installation Team:





# Machinery for Installation:



# The Install numbers:

- 43.4 Km of Pipe work
- 40 Km of Irrigation cable
- 173 Valve boxes
- 1620 Irrigation Heads

# Project Start:



- We do a full GPS survey of the existing Irrigation system and any existing infrastructure utilities that we must not damage.
- A health & safety analysis alongside the club management to keep golfers safe!
- Mark out the new system by GPS and the irrigation designer
- **START INSTALLING!**

# Provisional Time schedule 2024

	April					May					June				July					August					September				October			
Description	w14	w15	w16	w17	w18	w19	w20	w21	w22	w23	w24	w25	w26	w27	w28	w29	w30	w31	w32	w33	w34	w35	w36	w37	w38	w39	w40	w41	w42	w43	w44	
<b>Valley 1-9</b>	■	■	■	■	■	■	■																									
<b>Valley 10-18</b>						■	■	■	■	■	■	■	■																			
<b>Driving range/putting greens</b>												■	■																			
<b>Masters 10-18</b>															■	■	■	■	■	■	■											
<b>Masters 1-9</b>																					■	■	■	■	■	■	■					
<b>Clubhouse &amp; Entrance Road</b>																											■	■	■			

# Mainline Installation & Valves



- Mainline pipes will be laid out along the route where they will be installed
- Larger pipes 225mm & 200mm pipes will be butt welded.
- Smaller mainline pipes 160mm, 110mm & 90mm pipe will be fusion couplers

# Mainline Installation & Valves



# Main Line Completion:




# Lateral Pipe and Irrigation Head installation



- Once the new position of the Irrigation head has been approved by the Irrigation designer we “Hope” that we can “mole plough” the pipe and cable into the ground from the mainline to the sprinkler location.



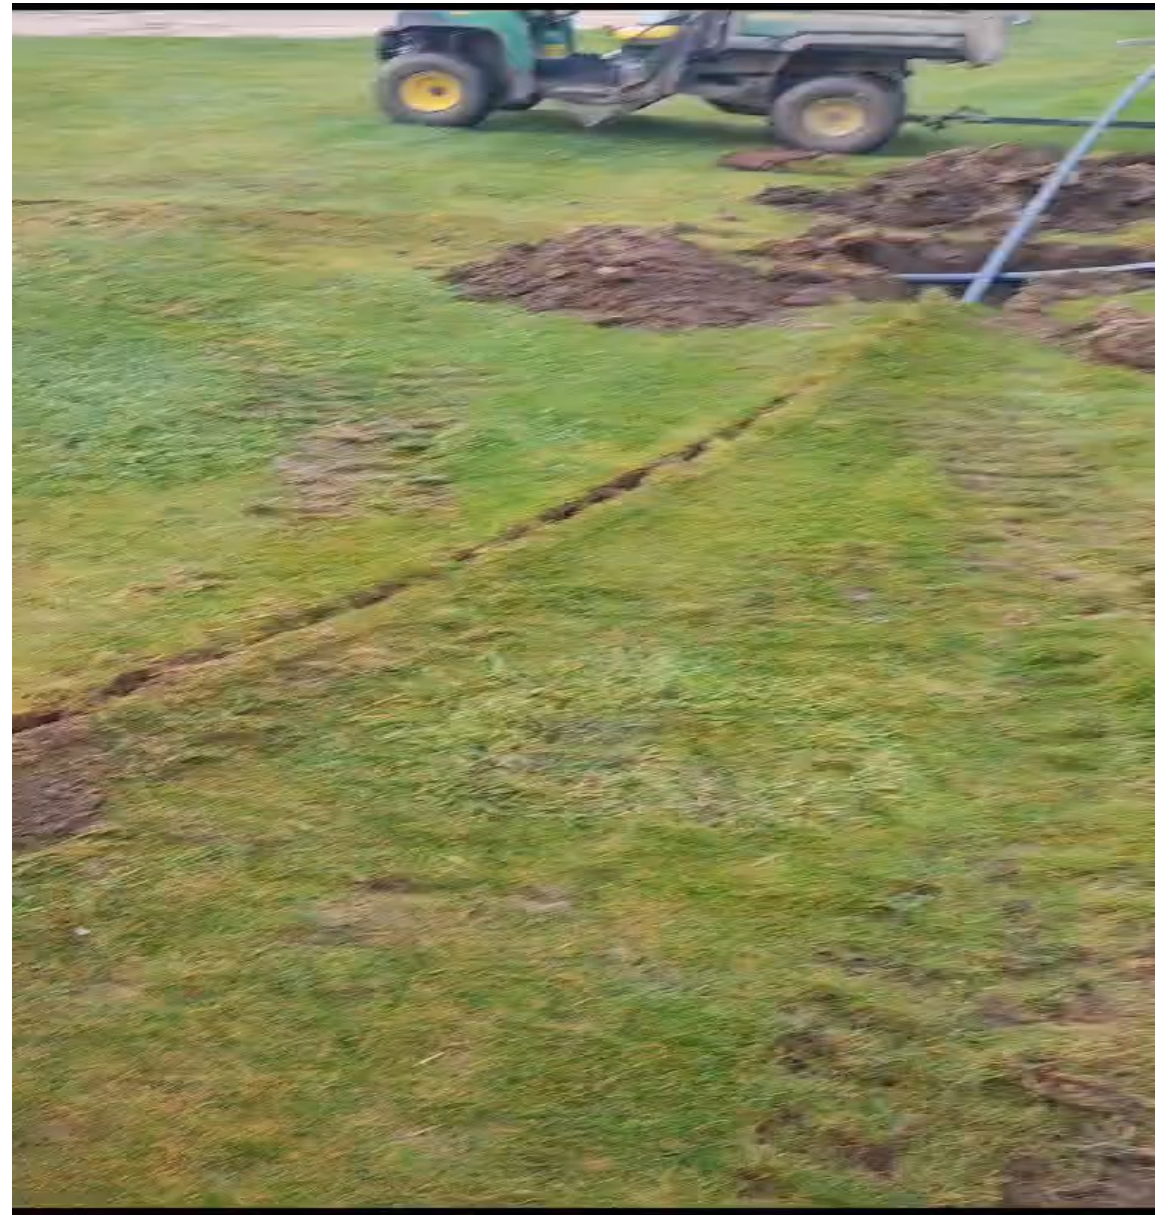






Legend:

	Ø250mm PE100 SDR17 (10 bar)
	Ø125mm PE100 SDR17 (10 bar)
	Ø90mm PE100 SDR17 (10 bar)
	Ø63mm PE100 SDR17 (10 bar)
	Ø50mm PE100 SDR17 (10 bar)
	green valve
	tee valve
	green sprinklers
	tee sprinklers
	fairway sprinklers
	electric connection
	drain off valve

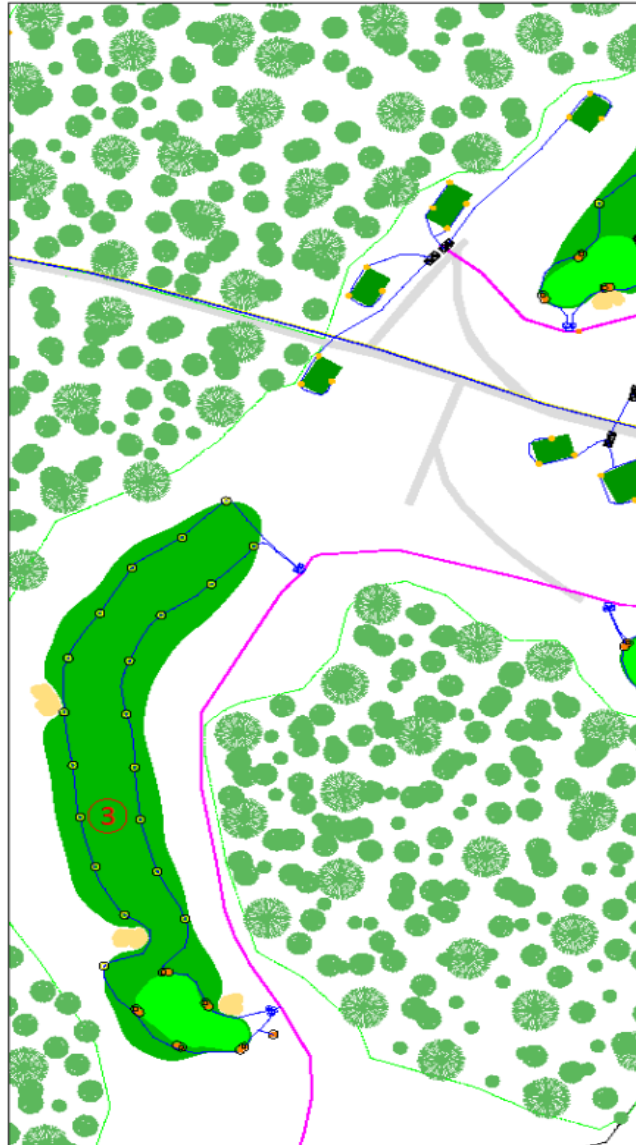

At the end of the project, the client receives a full GPS as-build document that shows all irrigation hardware installed on each hole for ease of maintenance.







